

Product User Quick Guide

Programming Decoders with a DOU


September 2022

GTI-PUG-001-0922-GB

Distribution Regions: All Regions

Product Relevance: GTI-PC only

1. Connect the Programming Lead to the DOU front panel.
2. Connect the decoder to the programming lead using the coloured crocodile clips:
 - a. See window below for connection sequence.
3. From the main menu in the GTI software, select **<Setup> <Decoder Programmer>**.
4. The **Decoder Programmer** window opens (The Gemini programmer does not include a reference to the green decoder wire):

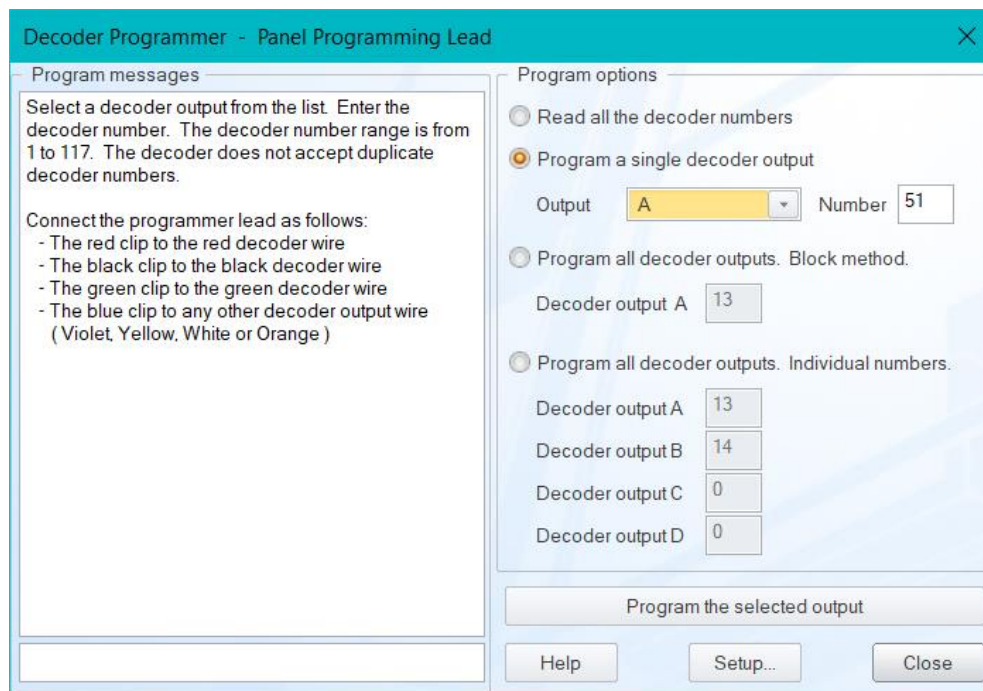

5. Select your required programming option.
6. Once the selection has been made click the **Program the selected output** button. The caption of this button depends on the selected option.

Programmable decoder numbers for Trident 114:

- 1 to 110
- 114 to 117

Programmable decoder numbers for Gemini 109:

- 1 to 95
- 101 to 102
- 104 to 110
- 113 to 117